ESET Tech Center

Configure ESET PROTECT to automatically deploy ESET endpoint products to unprotected computers (8.x)

Steef | ESET Nederland - 2021-01-14 - Reacties (0) - ESET PROTECT

Issue

- Create a new dynamic group that identifies client computers not protected by ESET endpoint products
- Create a task to deploy ESET endpoint products to unprotected computers

Solution

> ✅ Examples of Dynamic Group templates and their use
>
> For additional examples of using Dynamic Group templates, see Dynamic Group template - examples in ESET PROTECT Online Help and **Related articles** below.

> ⚠️ ESET PROTECT 8.x User Permissions
>
> This article assumes that your ESET PROTECT user has the correct access rights and permissions to perform the tasks below.
>
> If you are still using the default Administrator user, or you are unable to perform the tasks below (the option is grayed out), see the following article to create a second administrator user with all the access rights (you only need to do this once):
>
> Create a second administrator user in ESET PROTECT

I. <u>Create New Dynamic Group</u>

A user must have the following permissions for their home group:

Functionality	Read	Use	Write
Groups & Computers	✓	✓	✓

Once these permissions are in place, follow the steps below.

1. Open ESET PROTECT Web Console in your web browser and log in.

2. Click **Computers** 🖥️.
3. Select the static group that will be the parent of the new group, click the gear icon and then select **New Dynamic Group** from the context menu.
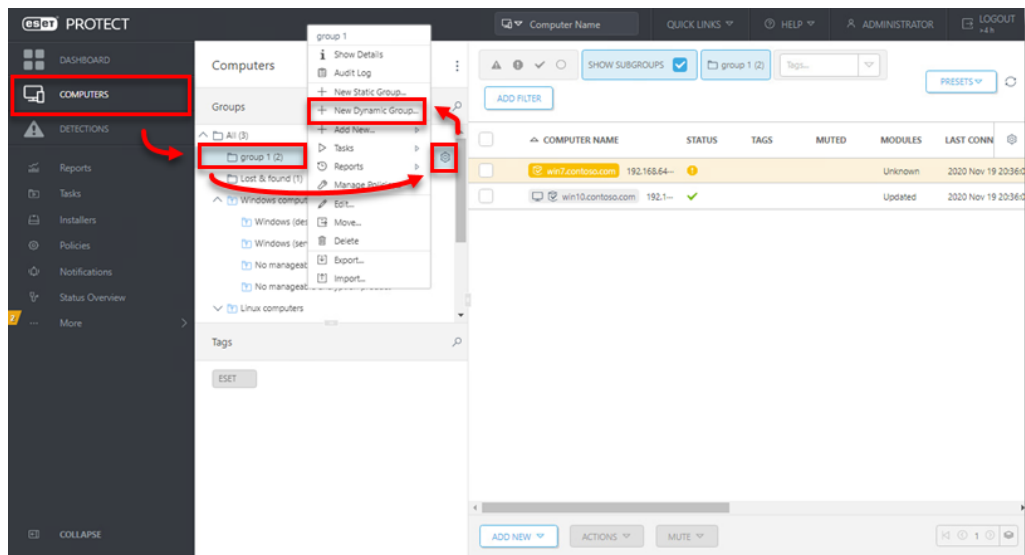
4. Type a name for the group in the **Name** field. If necessary, configure the **Description** and **Parent Group** settings to your preferences.
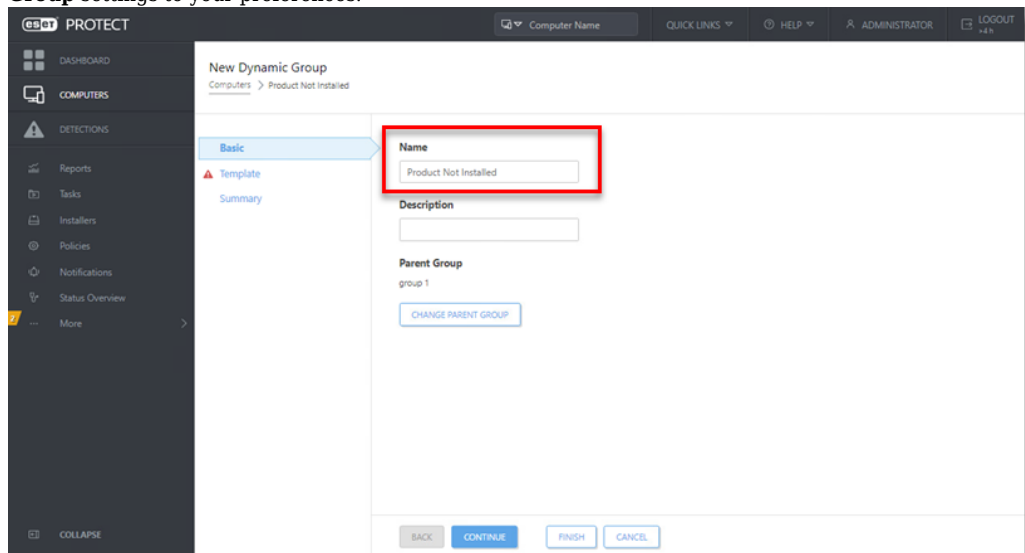
5. Click **Template → New**.
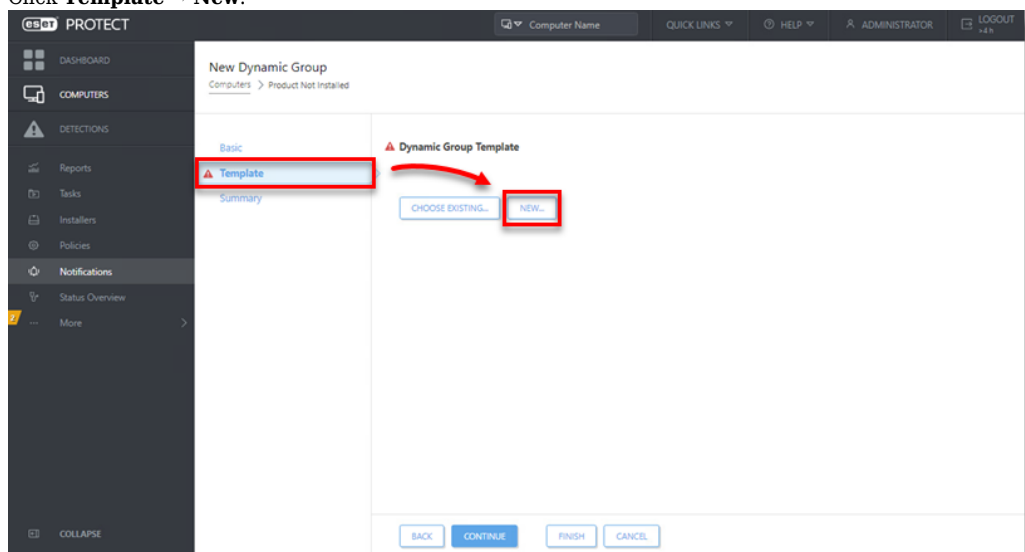
6. Type a name in the **Name** field.

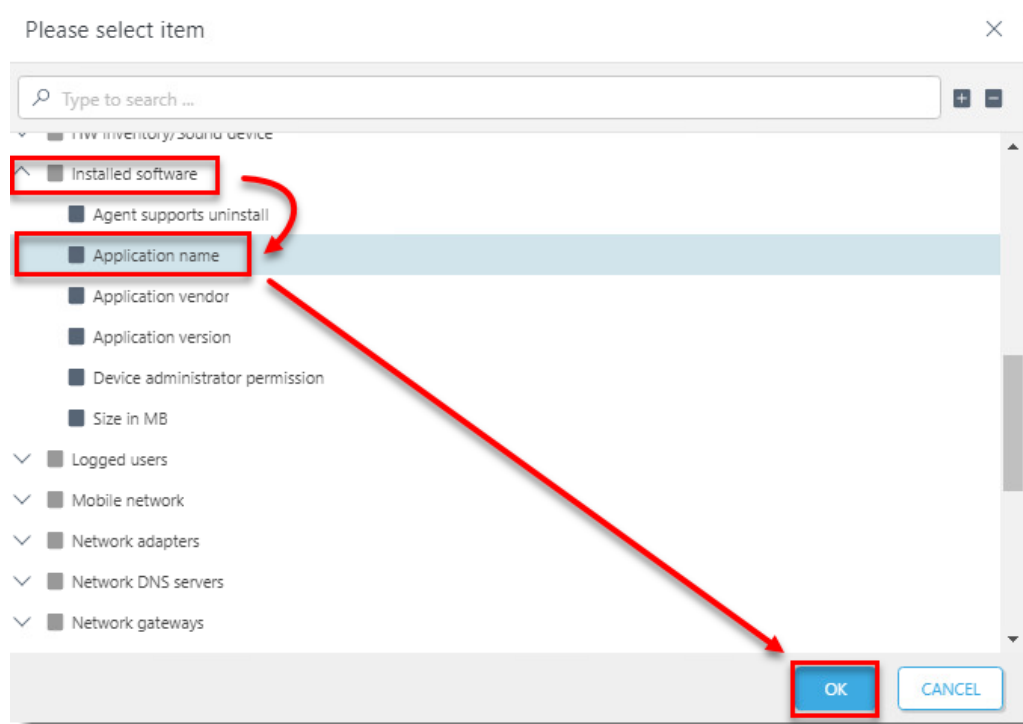7. Click **Expression**, select **NOR (All conditions have to be false)** from the **Operation** drop-down menu and then click **Add Rule**.

8. Expand **Installed software**, select **Application name** and then click **OK**.

9. Select **has prefix** from the drop-down menu, enter **ESET Endpoint Security** or **ESET File Security** depending on which product will be automatically deployed to client workstations in this dynamic group, and then click **Finish**.
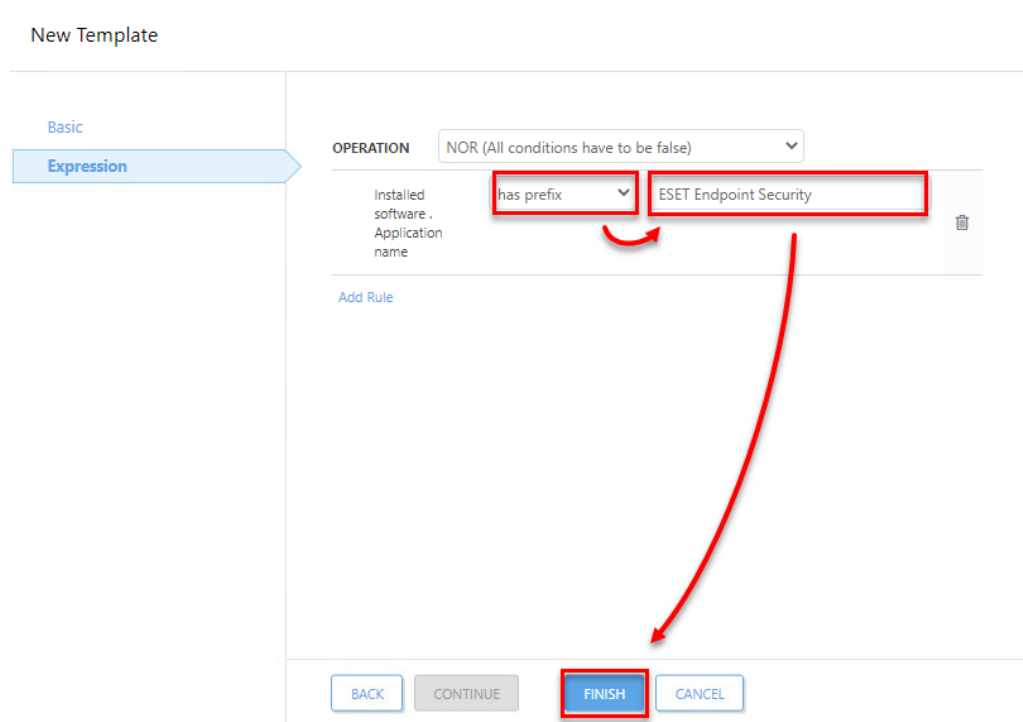
10. Click **Finish** and proceed to part II.
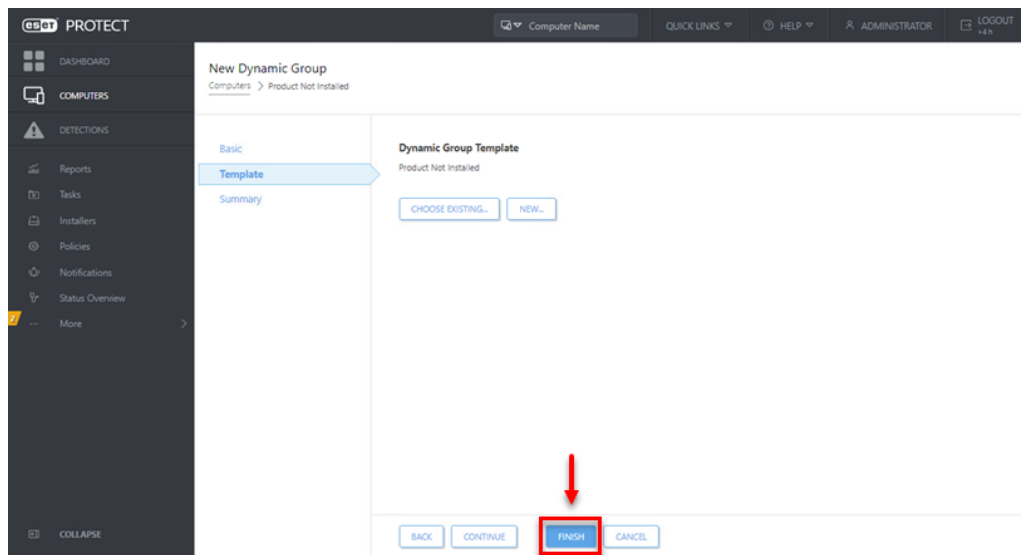
II. <u>Create a new Client Task to deploy ESET endpoint products to unprotected clients</u>

A user must have the following permissions for each affected object:

Functionality	Read	Use	Write
Groups & Computers	✓	✓	✓

A user must have the following permissions for their home group:

Functionality	Read	Use	Write
Software Install (under Client Tasks)	✓	✓	✓

Once these permissions are in place, follow the steps below.

1. Click **Tasks**.
2. Expand **ESET Security Product**, select **Software Install,** click **New,** and then click **Client Task**.
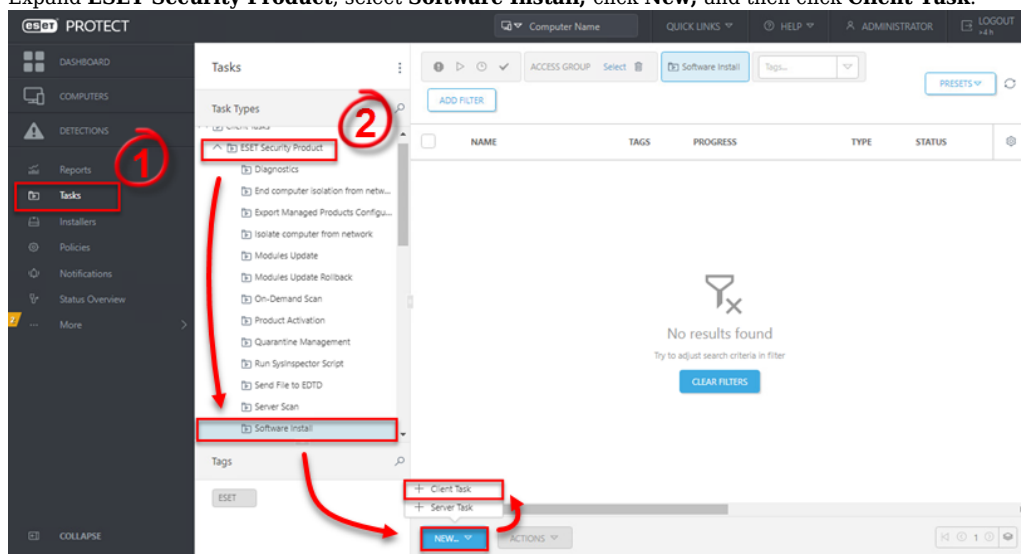
3. Type a name for the task in the **Name** field (configure the other settings in the **Basic** section as necessary).

4. Click **Settings** and click **Select** to choose your ESET license. You will add Targets after the task is created.

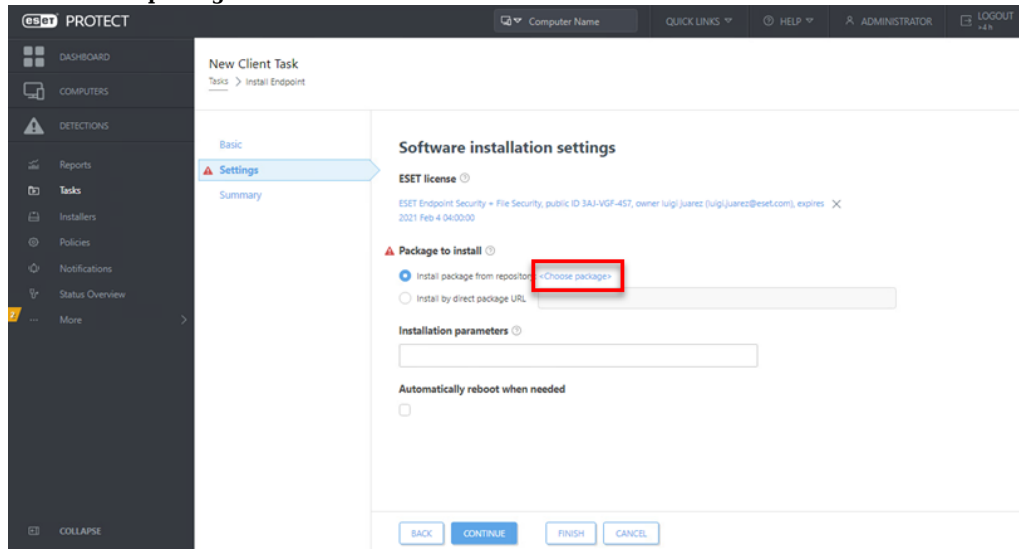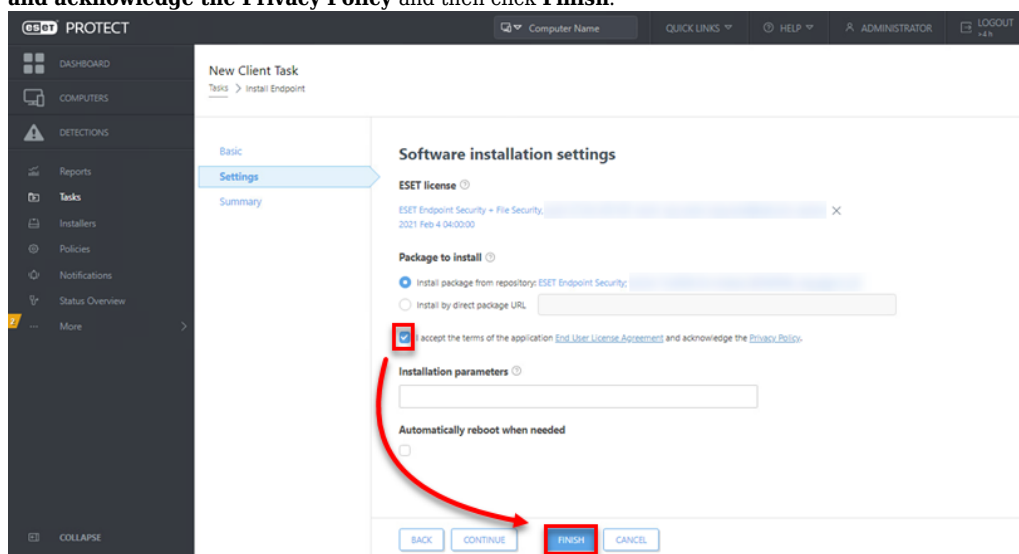5. Select a valid license and click **OK**.

6. Click **Choose package.**

7. Select the product you want to deploy and click **OK**.
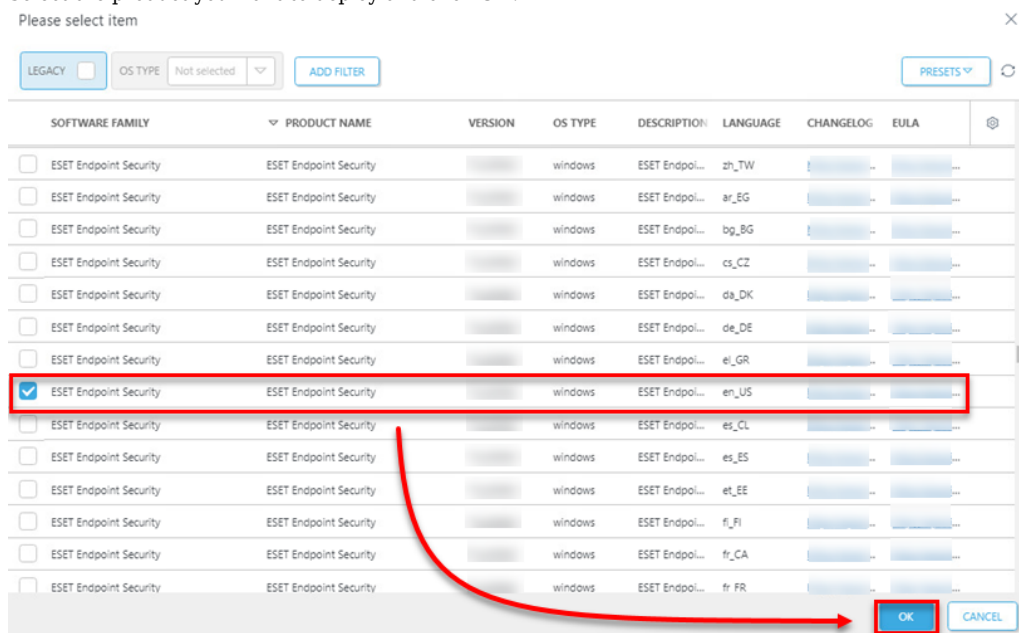
8. Select the check box next to **I accept the terms of the application End User License Agreement and acknowledge the Privacy Policy** and then click **Finish**.
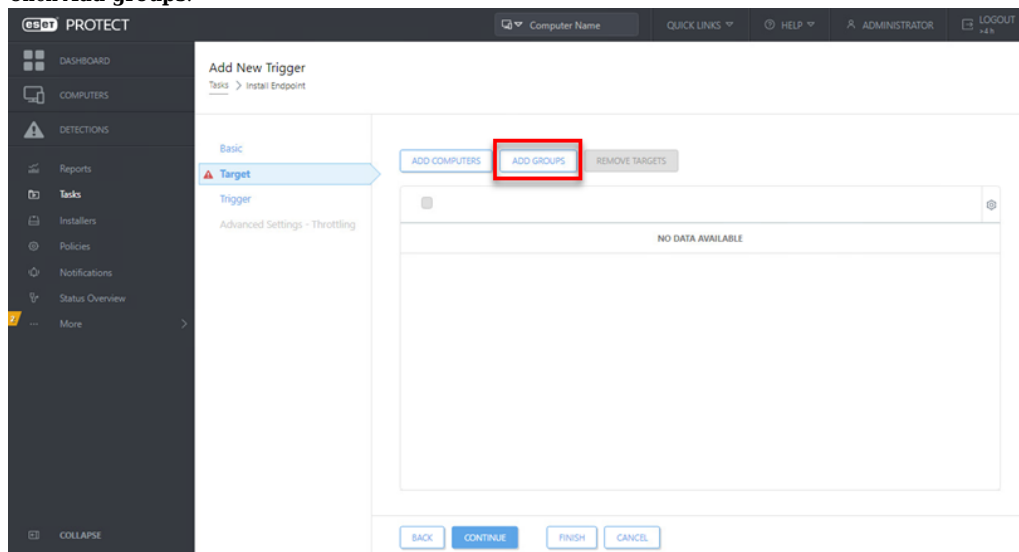

9. Click **Create Trigger** when you are asked whether you want to add a trigger for the client task.

Client task has been created. Do you want to add trigger now?
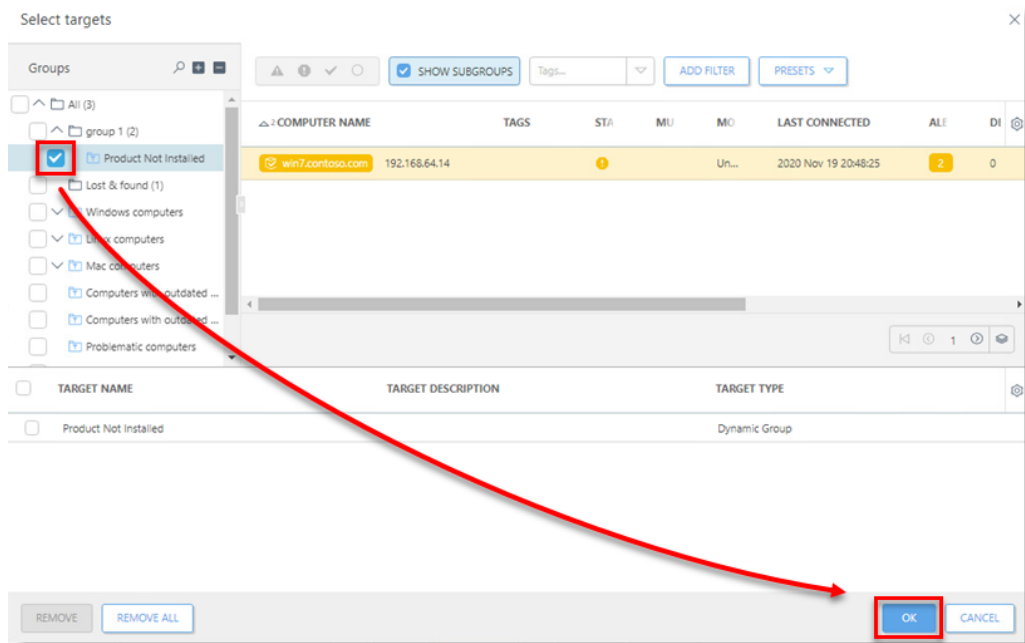
CREATE TRIGGER   CLOSE
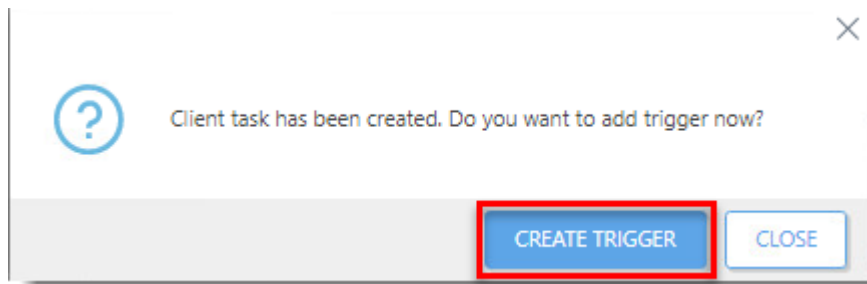
10. Enter a **Trigger Description** and click **Target**.
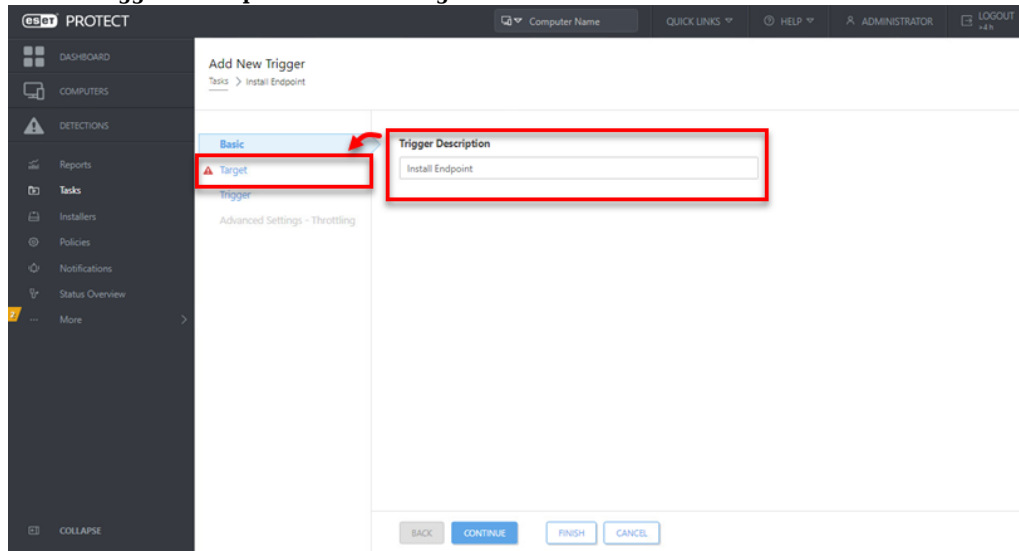
11. Click **Add groups**.

12. Select the check box next to the dynamic group you created in part I and click **OK**.

13. Click **Trigger** and select **Joined Dynamic Group Trigger** from the **Trigger type** drop-down menu.
14. Click **Finish**.