

# ESET Tech Center

Kennisbank > ESET PROTECT > Migrate ESET PROTECT from Windows Server to ESET PROTECT Virtual Appliance

---

## Migrate ESET PROTECT from Windows Server to ESET PROTECT Virtual Appliance

Steeff | ESET Nederland - 2021-01-15 - Reacties (0) - ESET PROTECT

### Issue

- In order to migrate ESET PROTECT Server from Windows Server to ESET PROTECT Virtual Appliance, you will need to back up the database from Windows Server and restore it into the ESET PROTECT Virtual Appliance

### Prerequisites:

- ESET PROTECT Server version 8.0 or later with database running at MySQL Server
- ESET PROTECT Server database must use a default name "era\_db" and username "root".




#### Supported MySQL database


The following guide is only applicable to ESET PROTECT running a [supported](#) MySQL database.

### Solution

1. Click [here](#) to download the ESET PROTECT Virtual Appliance for your particular hypervisor type. Deploy the ESET PROTECT VA into your virtual environment, for further information regarding this process, review the [VA Deployment support page](#). **Do not configure** the ESET PROTECT VA yet. After a successful deployment, follow the directions on the ESET PROTECT Virtual Appliance main screen to set a [static IP address](#).
2. On your existing Windows ESET PROTECT Server, create a new policy to set the new ESET PROTECT Server IP address and assign the policy to all client computers. Click **Policies → New Policy**.

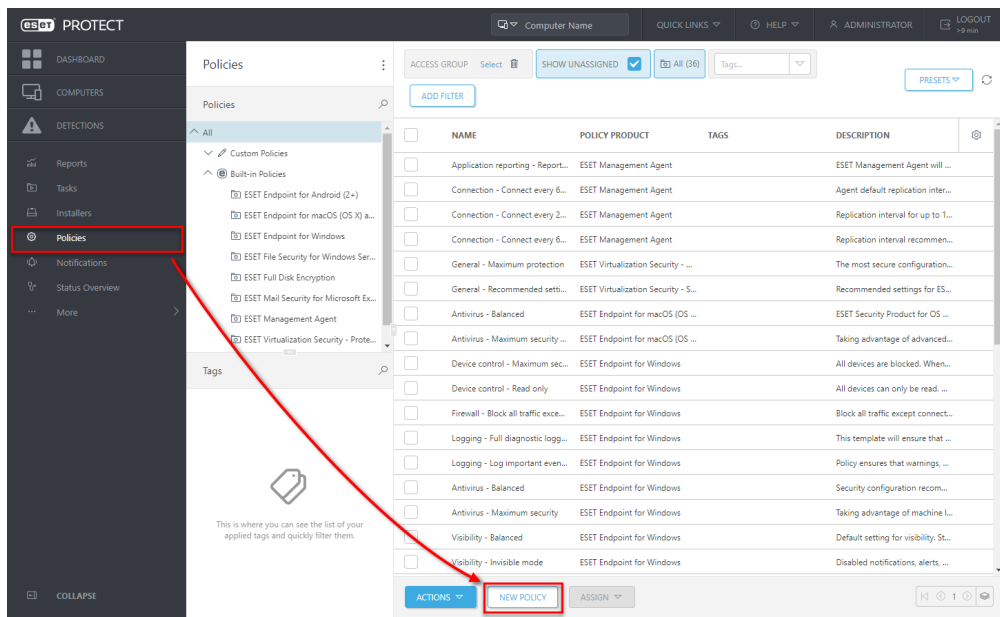


3. Enter a **Name** for your policy; the **Description** field is optional.
4. Click the **Settings** tab, in the drop-down menu, select **ESET Management Agent** and click **Edit server list**.

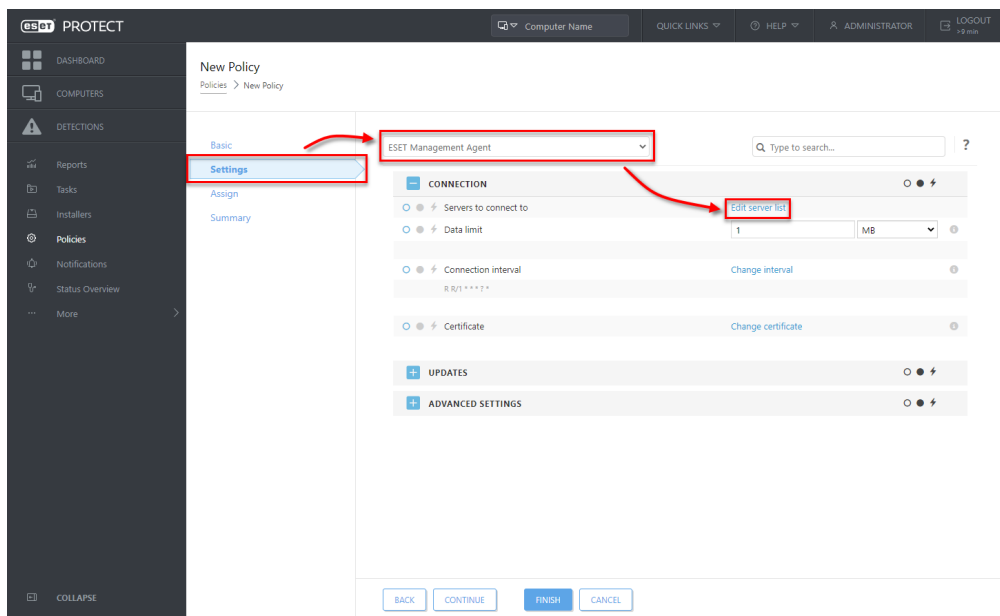


5. In the **Servers** window, click **Add**. In the **Host** field, type the IP address of your new ESET PROTECT VA. If you are using a different port, other than the default ESET PROTECT Server port 2222, specify your custom port number. Click **OK**. Make sure your new ESET PROTECT Server address is listed first and click **Save**.



6. Click the **Assign** tab to specify the clients that are targeted by this policy. Click the **Assign** button to display a new popup window with all Static and Dynamic Groups.

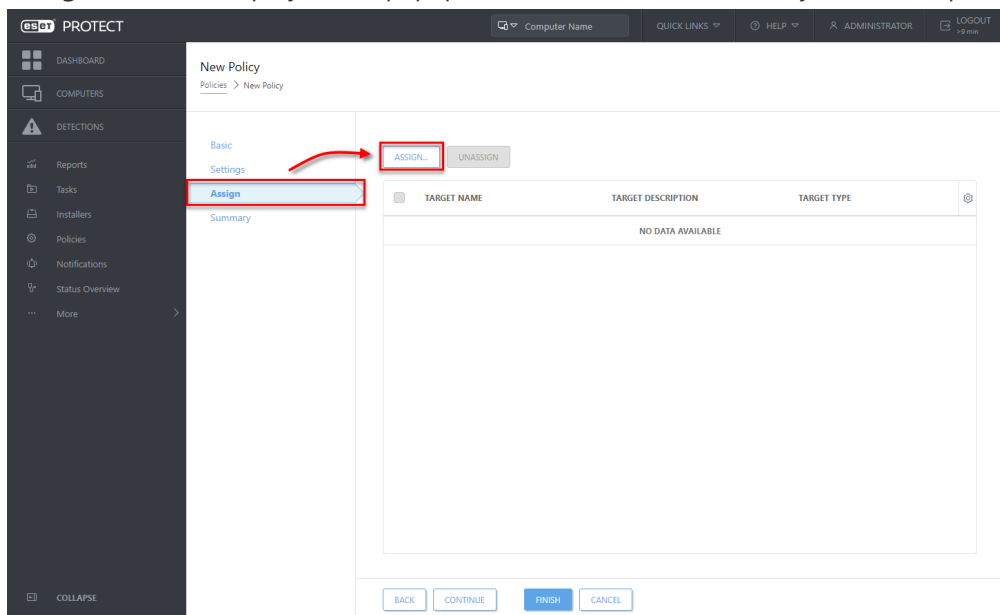


7. Select the Static Group *All* to assign a new policy and click **OK**.

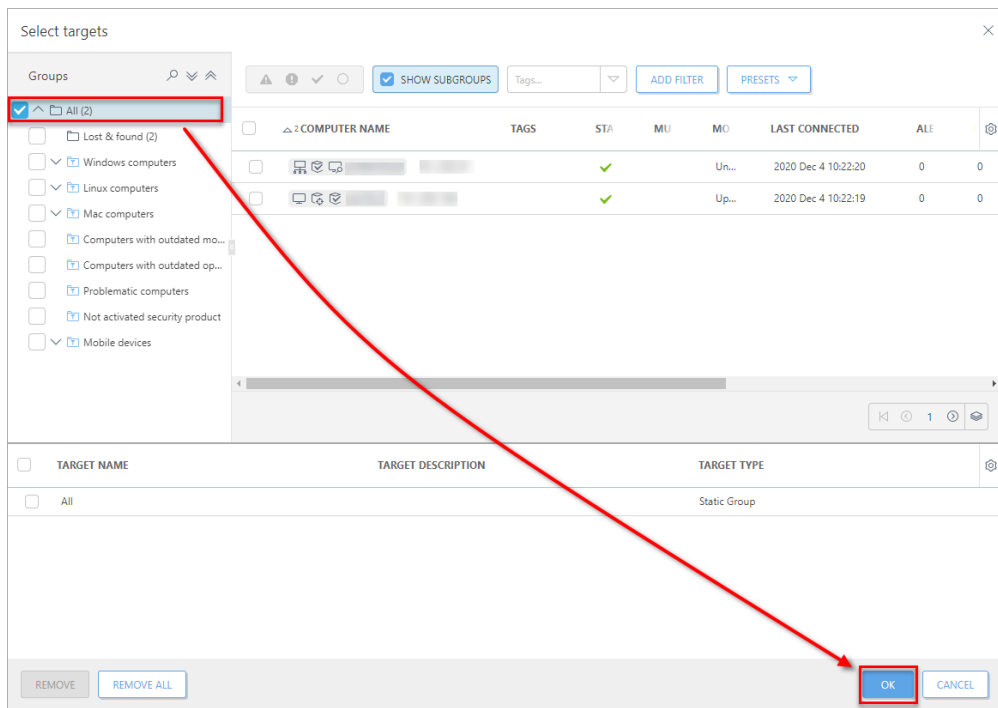


8. Review the settings for this policy and click **Finish** to apply. According to your ESET PROTECT Server settings, wait until the new policy is applied to agents.
9. **Stop** the ESET PROTECT Server service.
10. Create a full [database backup](#) of the source ESET PROTECT database. It is required that the ESET PROTECT database is named **era\_db**. Name the backup file *era-backup.sql*. Open a Command prompt and navigate to the MySQL Server binaries folder (default location is *C:\Program Files\MySQL\MySQL Server x.x\bin*) and run the following commands:
  1. Delete the contents of **tbl\_authentication\_certificate** table (otherwise, Agents may fail to connect to the new Server):
 

```
mysql.exe -u root -p -e "delete from era_db.tbl_authentication_certificate where certificate_id = 1";
```
  2. Create a database backup:
 


```
mysqldump --host localhost --disable-keys --extended-insert --routines -u root -p era_db > era-backup.sql
```
11. Return to the ESET PROTECT VA main screen. Press **Enter** to enter management mode, log in using the default password "eraadmin", and press **Enter** twice to confirm.

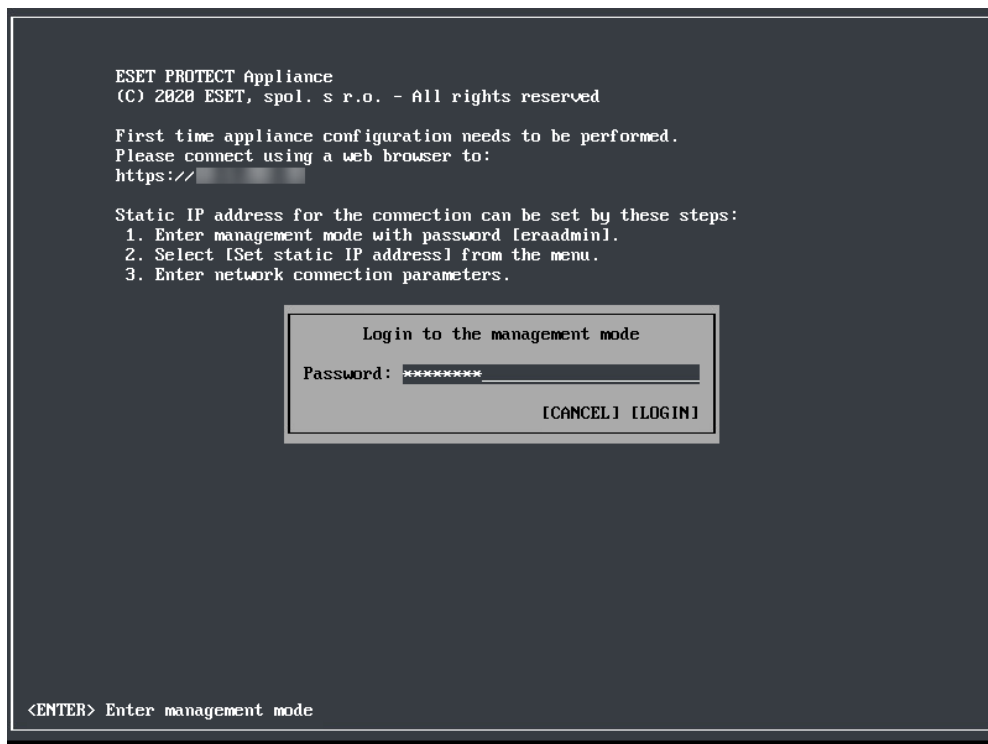


12. In the ESET PROTECT VA management mode menu, select **Enable/Disable remote access** to [enable the Webmin interface](#).
13. Connect to the Webmin interface using a web browser with an IP address of ESET PROTECT VA and port 10000. The address to connect should look like:  
https://xxx.xxx.xxx.xxx:10000
14. Log into the Webmin interface using the default ESET PROTECT VA credentials where *root* is the login and *eraadmin* is the password.

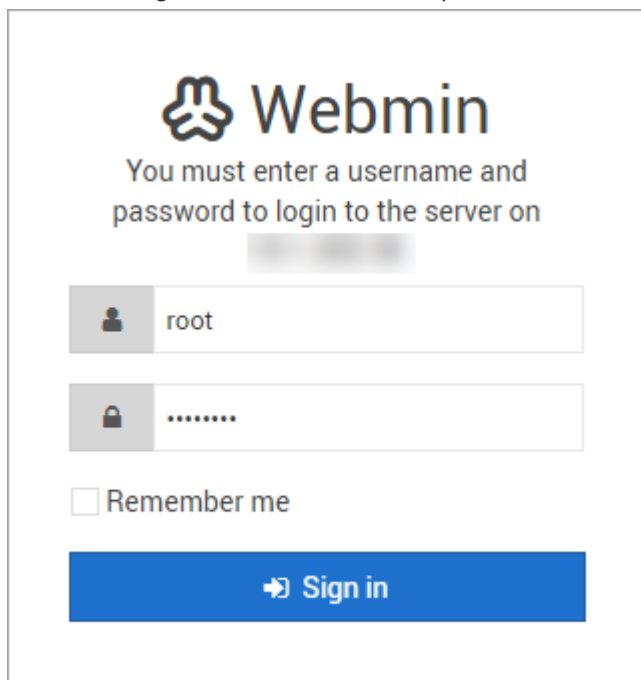


15. From the main menu, expand **Others**, select **File Manager**, and then navigate to folder */root/*.

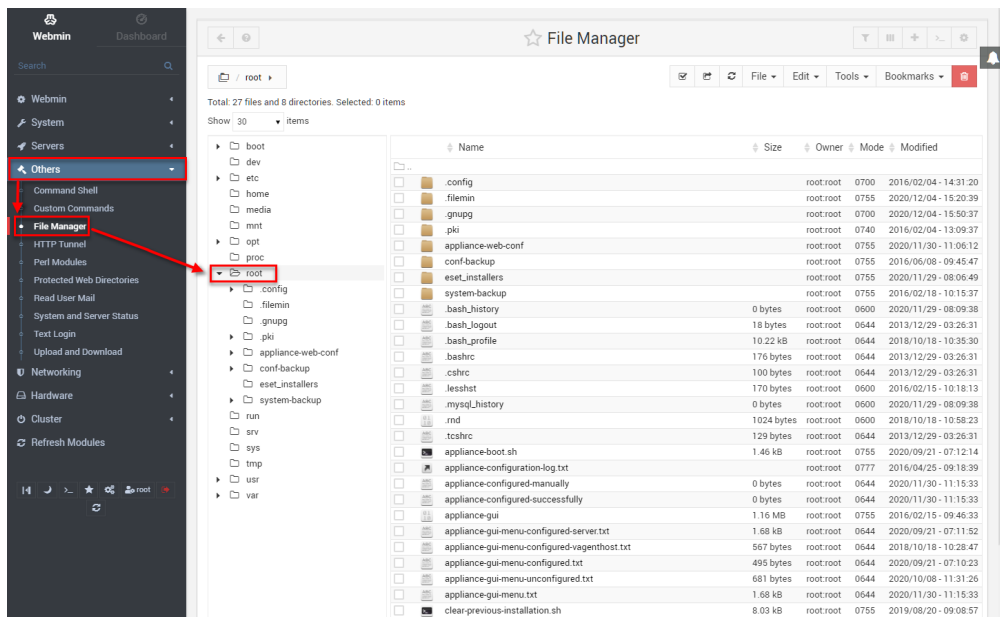


16. In the top right corner of **File Manager**, click **File** and select **Upload to current directory**.

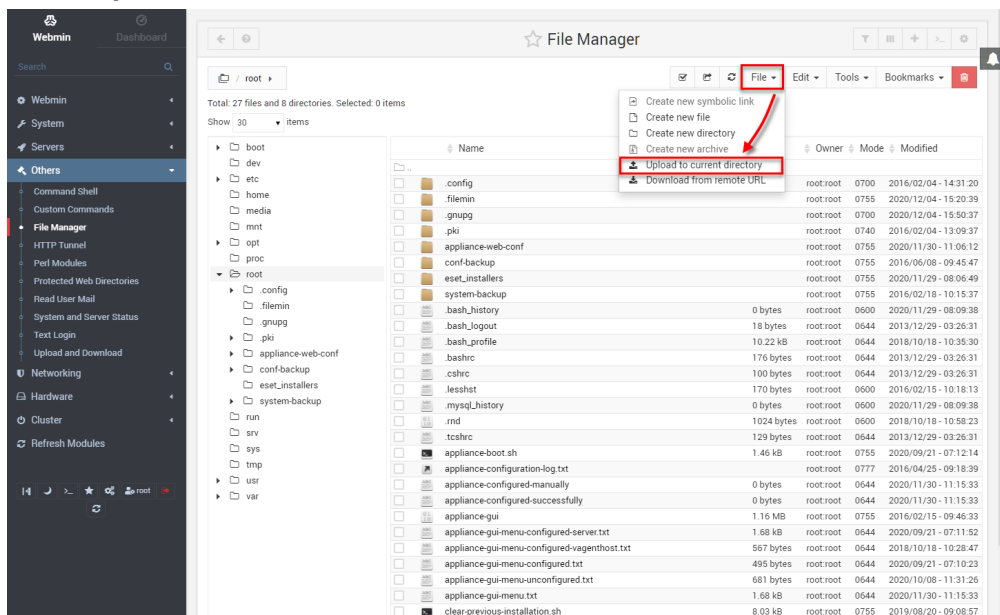


17. Click the **Drag and drop files here** and locate the *era-backup.sql* file you created in step 10. To upload the file, click **Upload**. When the upload is complete, log out of Webmin.

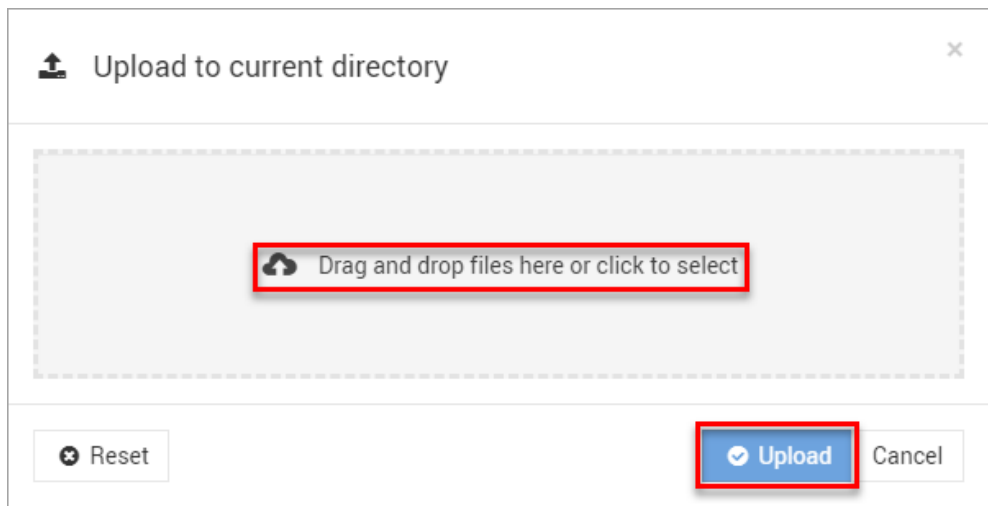

18. In the ESET PROTECT VA main screen, log in to management mode. Select **Restore database** from the menu and press **Enter**. When the restoral of database backup is finished, press **Enter** to return back to the main screen.

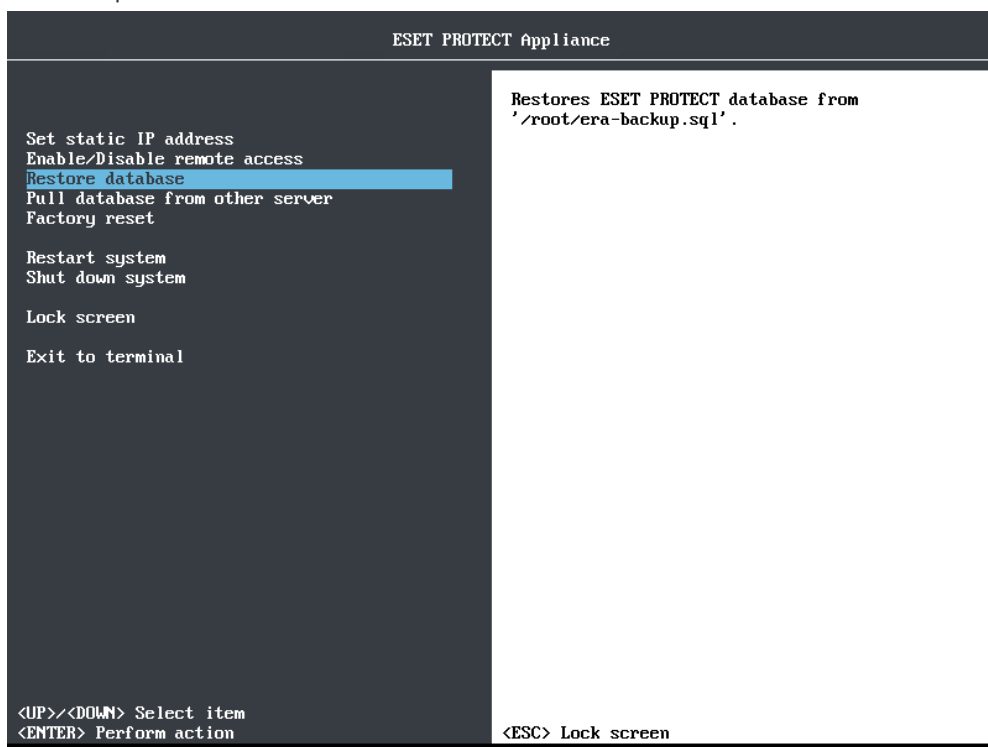

19. Configure the ESET PROTECT VA. Connect to the appliance using a web browser with an IP address of the ESET PROTECT VA. In the drop-down menu, select **ESET PROTECT Server Appliance**.

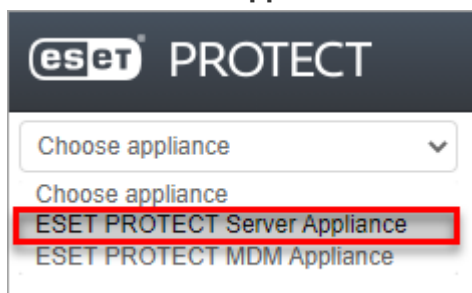

20. Set a new **password** for the VM. Select the check box **I accept the terms of the application End User License Agreement and acknowledge the Privacy Policy**. Click **Submit** to start ESET PROTECT VA configuration. Do not refresh this page in your web browser; close the tab and go to your ESET PROTECT VA console window.

The screenshot shows the ESET PROTECT Server Appliance configuration interface. The page title is "ESET PROTECT Server Appliance". The configuration is organized into sections:

- APPLICATION**: Includes a "HOSTNAME" field with a placeholder "The fully qualified hostname for this VM (e.g.: protect.domain.com). Leave blank to try to reverse lookup the IP address."
- PASSWORD**: A field for the password, highlighted with a red box. Below it, a note states: "VM, database, server certification authority and server webconsole password. Use ASCII characters except reserved [ ] and [ ]."
- LOCALE**: A dropdown menu set to "en-US" with a note: "The locale used for pre-defined objects created during installation."
- WINDOWS WORKGROUP**: A text input field with a note: "The workgroup or NetBIOS domain name for this server (e.g.: DCMAIN). Leave blank if workgroup should be extracted as first token from the domain and converted to upper case."
- WINDOWS DOMAIN**: A text input field with a note: "The domain for this server (e.g.: domain.com). Leave blank if no domain synchronization and authorization will be performed."
- WINDOWS DOMAIN CONTROLLER**: A text input field with a note: "The domain controller for this server (e.g.: dc.domain.com). If domain controller hostname is not recognized by default DNS server, please set this domain controller's IP address as DNS server for this VM. Leave blank if no domain actions will be performed."
- WINDOWS DOMAIN ADMINISTRATOR**: A text input field with a note: "Administrator. The administrator account used for joining domain."
- WINDOWS DOMAIN ADMINISTRATOR PASSWORD**: A text input field with a note: "The administrator password used for joining domain. Leave blank if no domain joining will be performed."
- SNMP MANAGER HOSTNAME**: A text input field with a note: "The SNMP manager hostname that will be receiving forwarded SNMP traps. Leave blank if no SNMP traps should be forwarded."
- ENABLE HTTP FORWARD PROXY**: A checkbox that is currently unchecked, with a note: "Enables HTTP forward proxy for caching updates (minor replacement). Policies to redirect HTTP traffic will be created and assigned to all managed products during clean appliance installation."

At the bottom left, there is a "SUBMIT" button and a checkbox labeled "I accept the terms of the application End User License Agreement and acknowledge the Privacy Policy". Both are highlighted with red boxes. A red arrow points from the "SUBMIT" button to the "PASSWORD" field.

21. When the configuration is finished, [log into the ESET PROTECT Web Console](#) using the new password and verify the agents have migrated successfully and are connecting to the new server. Do not uninstall your old Windows ESET PROTECT Server until you have verified migration was successful.